

## HIGHLIGHTS

- Softly gestures to the occupant to create a human connection
- OLED direct illumination available in 90+ CRI in 3000K and 4000K
- Large Kindred consists of 28 OLED panels
- Medium Kindred consists of 12 OLED panels
- Flicker-free dimming by remote eldoLED® driver



eldoLED

## SPECIFICATIONS

### Construction

Formed aluminum housing.

### Mounting

Pendant using decorative canopy. Four fastener mounting with no exposed fasteners. Luminaire can be mounted in grid and hard ceiling conditions.

### Source

OLED source available in 90+ CRI with color temperature options (3000K and 4000K). 28 OLED panels per LRG Kindred. 12 OLED panels per MED Kindred.

### Finish

Standard colors for housing are painted aluminum, white or black.

### Electrical

Remote EldoLED 0-10V dimming driver. Multiple remote dimming drivers required.

### Environment

Ambient operating temperature between 0° C to 40° C.

### Validation

ETL/cETL listed for dry locations.

### Warranty


3-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/support/customer-support/terms-and-conditions](http://www.acuitybrands.com/support/customer-support/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.


All values are design or typical values, measured under laboratory conditions at 25 °C.

## DIMENSIONS

### LRG

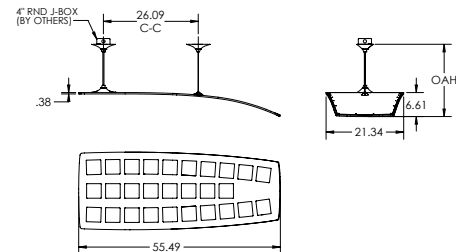

### MED

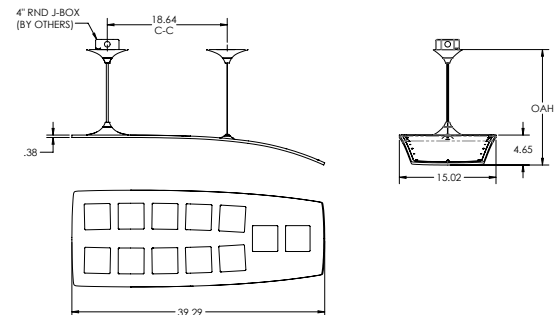

## ORDERING INFORMATION Example: CALS KINDRED LRG O30K MO MVOLT ZT PM/18 C110

Series	Form	OLED Color Temperature	OLED Output	Voltage
CALS KINDRED	LRG Large MED Horizontal Medium	O30K 3000K O40K 4000K <i>Note: OLED available in 90+ CRI only</i>	MO Maximum Output ML Maximum Lifetime	MVOLT 120-277 VAC
Control Input	Mounting	Overall Height	Finish	
ZT 0-10V Dimming	PM/ Pendant Mount	-- *(height in inches)	C110 Painted Aluminum (low gloss) C041 White (fine textured)	C201 Black (fine textured) C099 Custom color

**PHOTOMETRIC PERFORMANCE (ESTIMATED)**

Nominal Luminaire Performance at Maximum Output (MO)


	LRG		MED	
	3000K	4000K	3000K	4000K
Luminance (cd/m <sup>2</sup> )	8500	7000	8500	7000
Lumens	7112	5600	3048	2400
Watts	114	118	49	51
Efficacy (lm/W)	62	47	62	47
L70 lifetime (hrs)	30,000	30,000	30,000	30,000

Nominal Luminaire Performance at Maximum Lifetime (ML)

	LRG		MED	
	3000K	4000K	3000K	4000K
Luminance (cd/m <sup>2</sup> )	3000	3000	3000	3000
Lumens	2660	2660	1140	1140
Watts	41	56	19	25
Efficacy (lm/W)	65	47	60	45
L70 lifetime (hrs)	100,000	100,000	100,000	100,000

**DISTRIBUTION**

100% Down

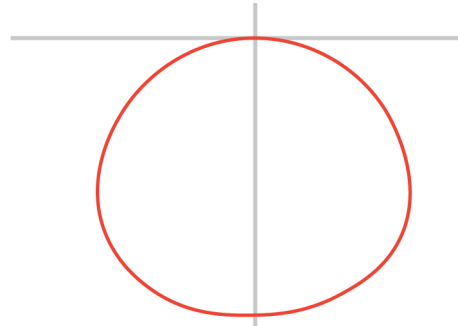

**CUSTOMIZATION**

Ask Winona about the following possibilities: additional mounting options, custom colors and other modifications.

