sensor**switch** ®

Embedded
Occupancy Sensors
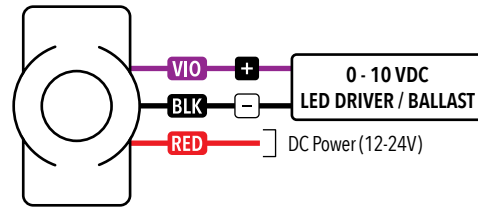## Wiring Diagrams

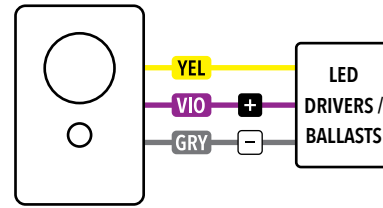---

LINE VOLTAGE SNAP-FIT
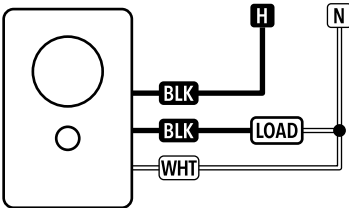
**LINE VOLTAGE 2-POLE EMBEDDED
SMALL BOX**
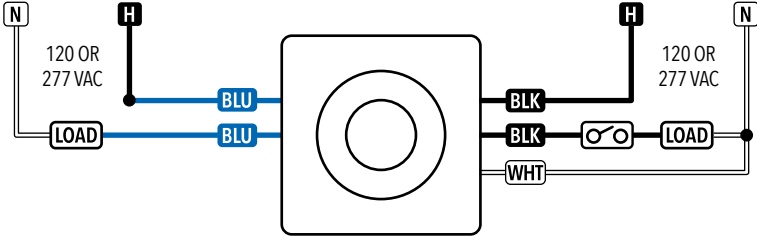
LOW VOLTAGE HIGH/LOW
OPERATION EMBEDDED

VIO **+**
BLK **−**

0 - 10 VDC
LED DRIVER / BALLAST

RED — DC Power (12-24V)

LOW VOLTAGE HIGH/LOW
OPERATION SNAP-FIT

YEL
VIO **+**
GRY **−**

LED DRIVERS / BALLASTS

HALEON eldoLED (EZ) DRIVER COMPATIBILITY
- Flash programing with Sensor Switch VLP App

YEL
BRO
+ **−**

HALEON 45 EZ OCC VLP WH LT

H — BLK
N — WHT

eldoLED DRIVER

VERTEX eldoLED (EZ) DRIVER COMPATIBILITY
- Flash programing with Sensor Switch VLP App

YEL
BRO
+ **−**

VERTEX 8F EZ OCC VLP

H — BLK
N — WHT

eldoLED DRIVER

*Acuity*Brands.